



|          |        |           |          |
|----------|--------|-----------|----------|
| PROJECT: | MODEL: | QUANTITY: | ITEM NO: |
|          |        |           |          |

# MOBILE BARS & BACK UP SERVICE

## For Conventional Beverage Service Using Cans and Bottles

### ARCHITECTURAL "AS-CB-MW" SERIES

**Increase beverage sales with a portable bar - built to serve as the toughest bar in town!**

- 1** Made from solid mahogany wood - featuring classical architectural elements from old world craftsmanship. Built from real wood and finished in a rich, traditional cherry stain
  - 2** Perfect for event hosting with conventional bar service - use of cans and bottles without dispensing system
  - 3** Made for mobile applications - FWE 5', 6', 8' Architectural series bars are constructed with a stainless steel tubular welded base frame, and designed to absorb vibration and shock during transport
  - 4** Conventional ice sink with drain. 60lb ice bin capacity with sliding stainless steel cover
  - 5** Removable bottle speed rail
  - 6** Matching back bar and ice carts are available
- \*Two year limited warranty**



AS-CB-6-MW

AS-PSC-6-MW  
(Shown with Optional Accessory Mirrored Canopy)

AS-IC-200-MW



Solid Mahogany Wood



Stainless Steel Construction



Ice Sink



Removable Speed Rail




made to serve you better



|          |        |           |          |
|----------|--------|-----------|----------|
| PROJECT: | MODEL: | QUANTITY: | ITEM NO: |
|----------|--------|-----------|----------|

# SPECIFICATIONS: MOBILE BARS & BACK UP SERVICE

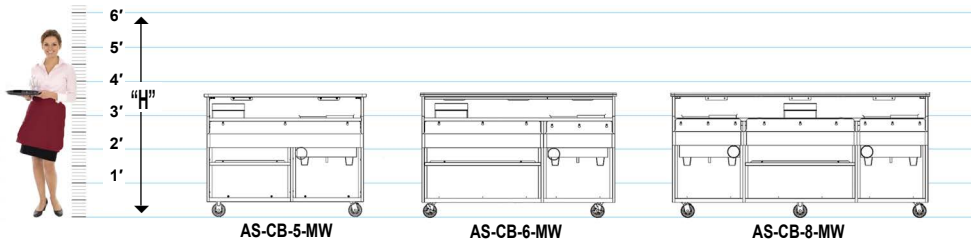


**MATCHING BACK BAR WITH OPTIONAL ACCESSORY MIRRORED CANOPY.**

Super back-up! Stores extra liquor, glasses and bar accessories. Convenient work / serve top. Recessed can lights above handsome Mirrored Canopy. Interior shelves adjustable on 1.5" spacings. Welded stainless steel frame assures years of profitable use. Large 5" casters with brakes allows easy mobility.



**MATCHING ICE STORAGE CART.** Holds 200 lbs. of ice! Fully insulated. Sliding stainless top. Drain, and all swivel 5" casters. Welded stainless steel frame.

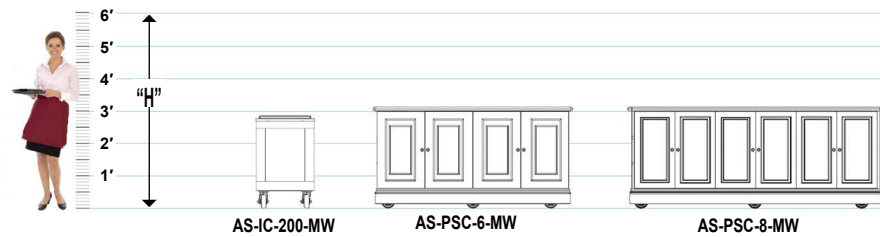

| OVERALL EXTERIOR DIMENSIONS IN. (mm) |              |              |              |                     |                        |             | Consult Factory for SHIPPING CLASS |  |
|--------------------------------------|--------------|--------------|--------------|---------------------|------------------------|-------------|------------------------------------|--|
| MODEL NUMBER                         | HIGH "H"     | DEEP "D" [A] | LONG "L"     | WORKING AREA HEIGHT | STORAGE AREA DIMS (IN) | CASTER SIZE | SHIP WT. LBS. (KG)                 |  |
| AS-CB-5-MW                           | 47.5" (1207) | 32.5" (826)  | 60.5" (1537) | 35.5" (902)         | 40.25W x 28.5H x 23D   | 5"          | 525 (237)                          |  |
| AS-CB-6-MW                           | 47.5" (1207) | 32.5" (826)  | 73" (1854)   | 35.5" (902)         | 43W x 28.5H x 23D      | 5"          | 570 (259)                          |  |
| AS-CB-8-MW [B]                       | 47.5" (1207) | 32.5" (826)  | 96" (2438)   | 35.5" (902)         | 30W x 28.5H x 23D      | 5"          | 868 (394)                          |  |

[A] With standard speed rail removed the width dimension is 24.75"  
 [B] AS-CB-8-MW model furnished with 2 sinks.

| OVERALL EXTERIOR DIMENSIONS IN. (mm) |              |              |              |                   |             |                    |
|--------------------------------------|--------------|--------------|--------------|-------------------|-------------|--------------------|
| MODEL NUMBER                         | HIGH "H"     | DEEP "D"     | LONG "L"     | ICE TANK CAPACITY | CASTER SIZE | SHIP WT. LBS. (KG) |
| AS-IC-200-MW                         | 34.75" (883) | 22.25" (565) | 22.25" (565) | 200 lbs           | 5"          | 140 (64)           |

| OVERALL EXTERIOR DIMENSIONS IN. (mm) |              |              |            |             |                    |
|--------------------------------------|--------------|--------------|------------|-------------|--------------------|
| MODEL NUMBER                         | HIGH "H" [A] | DEEP "D"     | LONG "L"   | CASTER SIZE | SHIP WT. LBS. (KG) |
| AS-PSC-6-MW                          | 38" (965)    | 26.75" (679) | 75" (1905) | 5"          | 470 (213)          |
| AS-PSC-8-MW                          | 38" (965)    | 26.75" (679) | 96" (2438) | 5"          | 630 (286)          |

[A] Height with canopy dimension is 89" (2261mm)

**CONSTRUCTION.** Heliarc welded, single unit construction shall consist of welded stainless steel base frame of heavy gauge 1" square stainless steel tubing with extra 10 gauge stainless steel caster corner plate reinforcements.

**BODY / TOP MATERIALS.** Classic raised solid Mahogany wood panels, fluted columns, crown molding and beveled edge "Chicago Arm" style bar top. Solid brass kick plate provided in front and sides of unit. All wood surfaces finished with polymer coating to deter scratching and gouging. Constructed with reinforced joints for additional strength and durability. Solid hardwood: Mahogany; Finish: Cherry. Full length, heavy gauge stainless steel angles reinforce front corners of body on inside, with high impact edging on outside corners. Work surface shall be constructed of 20 gauge stainless steel. Interior of body shall be lined with 22 gauge stainless steel, bonded to cabinet walls and bottom storage area. Seams shall overlap for greater durability and moisture resistance. Work and splash areas shall be polished stainless steel with easy-to-clean covered corners. Front edge shall have raised marine nosing to retard spills. Laminate, Graphite Nebula, bar top with an oversized mahogany wood "Chicago Arm" surround.

**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Eight (8) foot models are equipped with six (6) casters: two (2) rigid casters and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**STORAGE AREA.** On all models, the bottom storage area shall be stainless steel lined. Provided with one shelf.

**ICE CHEST.** Insulated ice chest shall be one piece stainless steel with coved corners: 19.75" x 12.75" x 10.5" deep with shut off drain valve. 60lbs ice storage capacity. Ice chest includes two piece stainless steel sliding lid.

**BAR ACCESSORIES.** Standard equipment shall include 4.25" deep, heavy gauge stainless steel full length bottle speed rail; removable without tools. Towel ring shall be mounted to working side. Stainless steel condiment holder.

**Optional Accessories**

- Locking bottle speed rail
- Locking doors for storage areas
- Stainless steel bar gutters
- Protective storage cover
- Built-in electric hand sink
- Custom stain
- Custom bar top

FWE products may be covered under one or more of the following U.S. patents: 288,299; 238,300; 3,952,609; 4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction. © 17 Food Warming Equipment Company, Inc. R.17.01



**FOOD WARMING EQUIPMENT COMPANY, INC.**  
 5599 HWY. 31 W. Portland, TN 37148  
 815.459.7500 | Fax: 815.459.7989 | sales@fwe.com

**800-222-4393**  
**www.FWE.com**



COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS