



GF975-5 Gas + Roof + Base Cabinet
SSP: Stainless steel with Black enamel front panels

Rotisol's GrandFlame Rotisserie Ovens epitomize beauty and functionality, featuring a unique cooking system. Visible flames & elegant finishes provide atmosphere, quality & design provide dependability and spit options and accessories allow for increased diversity.

Features:

- Floor unit
- 5 spits with independent motors for reduced down time and energy consumption
- 7 spit positions adjust distance from the heat
- Middle drip pan for cooking of different products without cross-contamination
- "K" glass doors to prevent heat loss for faster cooking, energy savings, and worker safety
- Powerful halogen lamp

Cleaning/Safety:

- Double interior panels to protect motors and gas lines from grease
- Removable interior panels for ease of cleaning
- Controlled opening and closing positions for doors

Ships with:

- 5 prongless anti-cutting spits included
- Channeled bottom drop pan with drain plug
- 2 spit movers

When it comes to rotisseries, Rotisol is your indispensable partner!

CAPACITY

10 15 Chickens per hour

POWER

Natural Gas, Propane Gas, All-Electric

CERTIFICATION



ACCESSORIES & OPTIONS

- Prongless V-Spit
- Prongless anti-cutting Spit
- Rectangular Basket Spit
- Ham/Turkey Spit
- Roast Basket Spit
- Complete Chicken Spit
- Lamb/Suckling Pig/ Prime Rib Spit
- Vertical Spit System with 9 accessory options
- Decorative/Protective Roof
- Base Cabinet with retractable table
- Heated Base Cabinet with retractable table
- Rolling Racks
- Wall rack for spit storage

FINISHES

- SS: All Stainless Steel with brass or chrome trim
- SSP: Stainless Steel with porcelain enamel or metal front panels in choice of colors
- LUX: Porcelain Enamel in choice of 45 colors with brass or chrome trim

STOCK COLOR OPTIONS



Rotisol-France, Inc • 341 North Oak Street, Los Angeles, CA 90302 • Tel/ 800-651-5969 310-671-7254 • Fax/ 310-671-8171
 www.rotisolusa.com info@rotisolusa.com



SPECIFICATIONS GRANDFLAME 975-5

PROJECT:	
ITEM NUMBER:	QTY:

DIMENSIONS (in inches)			
	WIDTH	HEIGHT	DEPTH
1-Rotisserie	40 3/8	44 5/8	22 1/2
2-Roof	38 5/8	6 3/8	25 5/8
3-Base Cabinet	38 5/8	29 7/8	23 7/8
4-Heated Base Cabinet	38 5/8	29 7/8	23 7/8
1+2+3	40 3/8	80 7/8	28 3/8
1+2+4	40 3/8	80 7/8	28 3/8
1+2	40 3/8	51	28 3/8
1+3	40 3/8	75 1/2	23 7/8
1+4	40 3/8	75 1/2	23 7/8

GAS MODEL - GF975-5	
GAS CONNECTION	
pipe ; 3/4", 55,000 Btu/h (natural) 50,000 Btu/h (propane) Minimum pressure: 7" WC regulator & shut off valve are furnished 2 burners per unit	
ELECTRICAL CONNECTION	
350 W / 208-220 V / 1 phase / 1.6 Amps (HBC) 1405 W / 208-220 V / 1 P 61.5 Amps 1 Electrical cable : 78" length / 60 Hertz NEMA plug not included - direct plug requ.	
Above finish floor connection :	
1 or 1+2= 9" AFF 1+4 or 1+3 = 19" AFF 1+4+2 or 1+3+2 = 30" AFF	

ELEC MODEL - GF975-5	
ELECTRICAL CONNECTION	
13,400 Watts / 208-220 volt 3 phases / 36 Amps Electrical cable : 78" length Direct plug required NEMA plug not included (HBC) 14 KW / 208-220 V / 3 P / 40 Amps	
Above finish floor connection :	
1 or 1+2= 9" AFF 1+4 or 1+3 = 19" AFF 1+4+2 or 1+3+2 = 30" AFF	

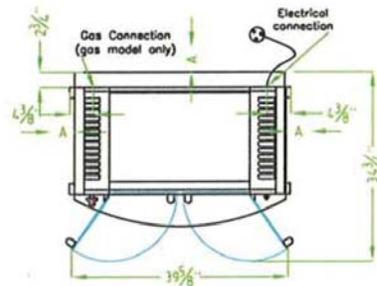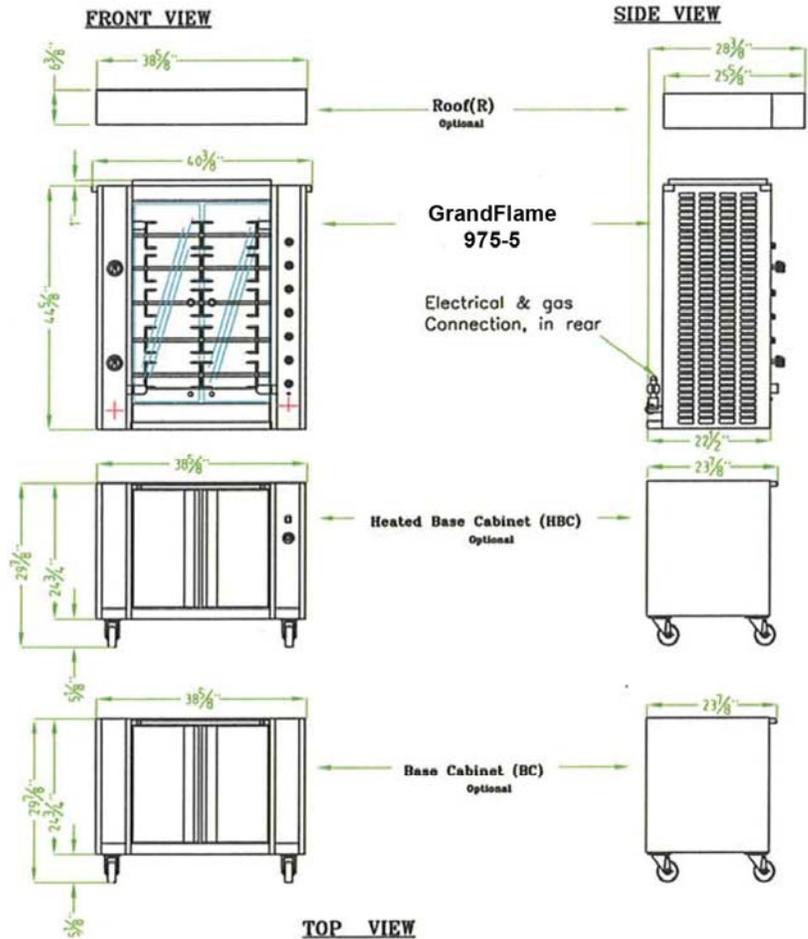

WEIGHT	NOTE	INSTALLATION REQUIREMENTS:	CLEARANCE :	PRODUCT CAPACITY:
- Roof : 22 Lbs - Rotisserie : 308 Lbs - Base Cabinet : 90 Lbs - Heated base cabinet : 100 Lbs - Pocking : 50 Lbs	- Nb of motors: 5 - Nb of spits: 5 - Nb of glass doors: 2 - Nb of halogen lamps: 1	- Oven must be installed level. - Exhaust ventilation is required Install on a non-combustible surface only - The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.	- 6" (152mm) left, right, and rear sides	- On V ANGLED SPITS (STANDARD): Up to 15 with 3-1/2 lb chickens Up to 20 2-1/2 to 3 lb chickens - For other spits please find the accessories specifications sheets

WARRANTY CONDITIONS:

Rotisol warrants its equipment to be free from defects in material and workmanship. Repairs must be performed by an authorized service company and it is the responsibility of the customer to return the defective parts to Rotisol France, inc. within 15 days (otherwise, the warranty will not be honored). The shipping charges for replacement parts, other than ground, will be at the customer's expense. This warranty does not cover glass door breakage and quartz or halogen lamp breakage, neither does it cover non-mechanical parts. This warranty does not apply to damages by accident, incorrect line voltage, fire, water, or other acts of god.